

1

2

3

4

5

6

7

8

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/12/29	Michael	Gavin	Stephen

A

B

C

D

E

F

A



B

C

D

E

F

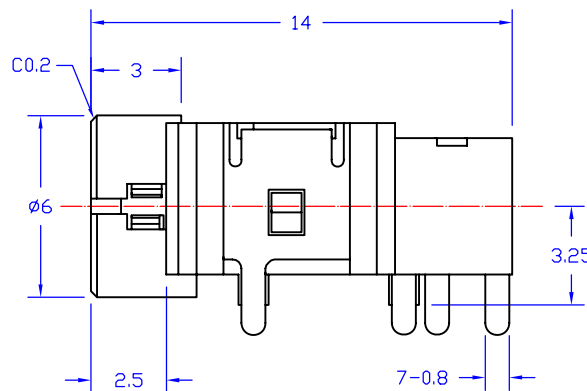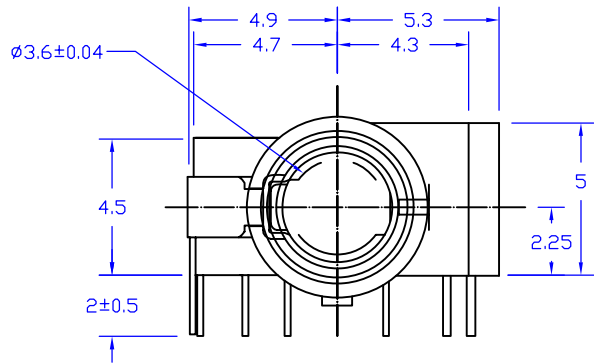

**NOTE:**

**Material and Finish:**

- 1. Housing: PA66 (UL94V-0), Black.
- 2. Terminal: Phosphor Bronze, Tin Plating Over All.

**Electrical Characteristics:**



- 1. Current Rating: 1.0 Amp. Max..
- 2. Dielectric Withstand Voltage: 500V AC RMS for 60Seconds.
- 3. Insulation Resistance: 1000M Ohms Min. at 500V DC.
- 4. Contact Resistance: 30m Ohms Max..

**Mechanical Characteristics:**

- 1. Operating Temperature: -25°C ~ +65°C
- 2. Contact Us for Customization.

**Table 1**

Part No.	Dimensions		
	H=4.5mm	Pos.	A B C
AEAJOR06G-007L	7		

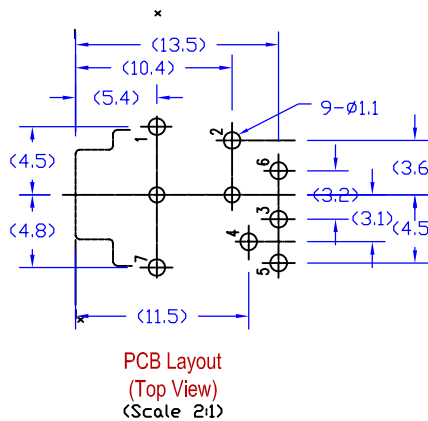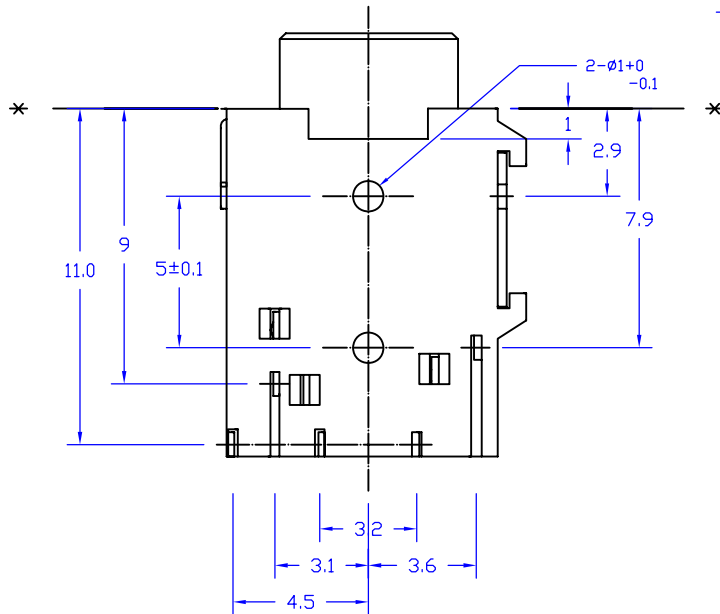

PART NO.	AEAJOR06G-007LA	AEAJOR06G-007LB	AEAJOR06G-007LC	AEAJOR06G-007LD
CIRCUIT				

Tolerance	
0	±0.30
0.0	±0.30
0.00	±0.20

Drawn By  
**Michael**

Checked By  
**Gavin**

Approved By  
**Stephen**

**AECONN**

**3.50mm Dia., Audio Jack, DIP Right Angle, 7P, Female**

AECONN Technology Corp.

**RoHS Compliant**

Drawing No. AJ006-S-01  
Page 1/1

1

2

3

4

5

6

7

8