

1

2

3

4

5

6

7

8

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/11/23	Michael	Gavin	Stephen

A

B

C

D

E

F

A

B

C

D

E

F

NOTE:
Material and Finish:
 1. Housing: LCP (UL94V-0), Black.
 2. Terminal: Phosphor Bronze, Gold Plated Over All, Nickel Barrier Plated on Mid Area.
Electrical Characteristics:
 1. Current Rating: 0.3 Amp. Max..
 2. Dielectric Withstand Voltage: 150V AC RMS for 60Seconds.
 3. Insulation Resistance: 1000M Ohms Min. at 250V DC.
 4. Contact Resistance: 20m Ohms Max..
Mechanical Characteristics:
 1. Operating Temperature: -55°C ~ +85°C
 2. Contact Us for Customization.









Table 1

Part No.	Dimensions				
	H=0.80mm	Pos.	A	B	C
AEBB6M01F-024L	24	4.40	5.40	6.30	
AEBB6M01F-030L	30	5.60	6.60	7.50	
AEBB6M01F-034L	34	6.40	7.40	8.30	
AEBB6M01F-040L	40	7.60	8.60	9.50	
AEBB6M01F-050L	50	9.60	10.60	11.50	
AEBB6M01F-054L	54	10.40	11.40	12.30	

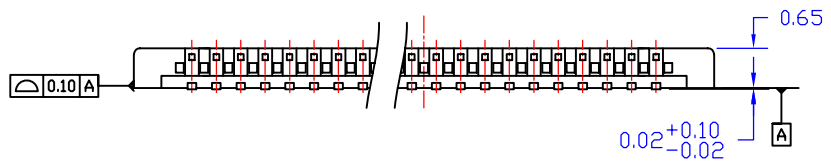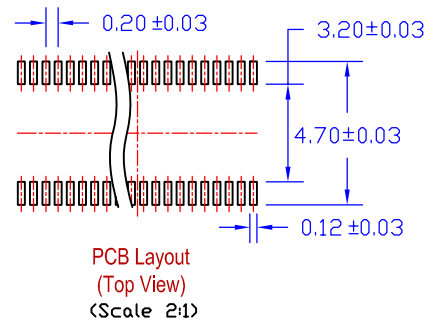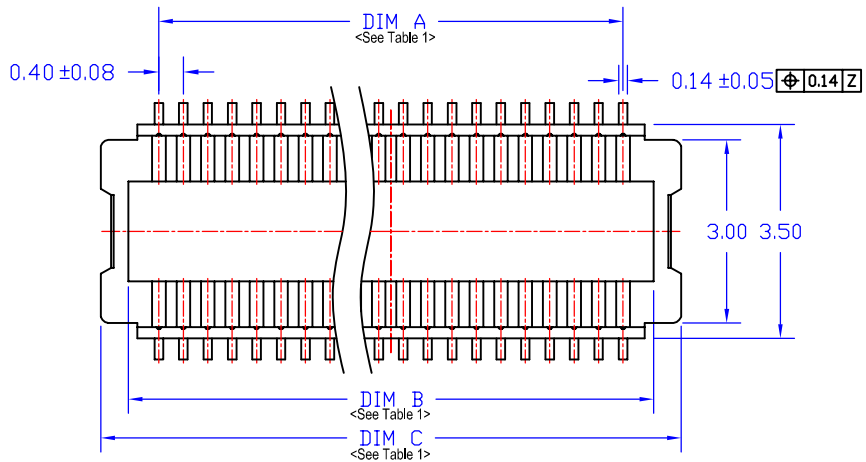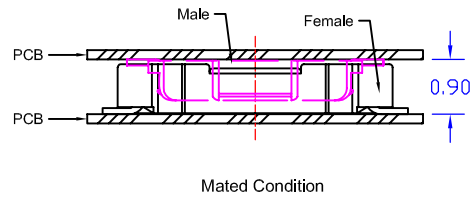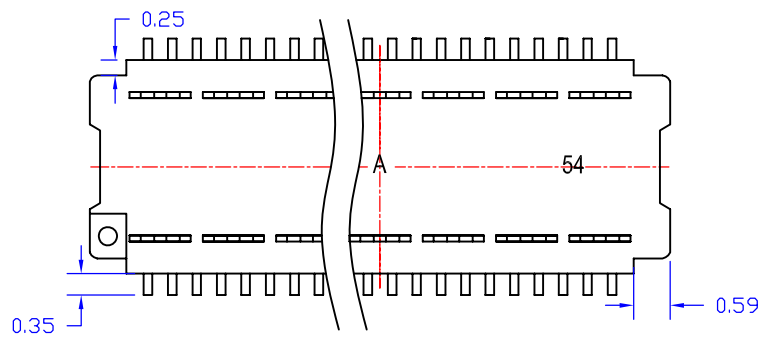

Tolerance 0 ±0.20 0.0 ±0.15 0.00 ±0.10	Drawn By Michael	
	Checked By Gavin	
	Approved By Stephen	
Scale 1:1	Unit mm	

AECONN	
Title 0.40mm Pitch, Board to Board, Surface Mount Vertical, Male, H=0.9mm	
AECOM Technology Corp.	

RoHS Compliant

Drawing No. BB001-S-01
Page 1/1

1

2

3

4

5

6

7

8