
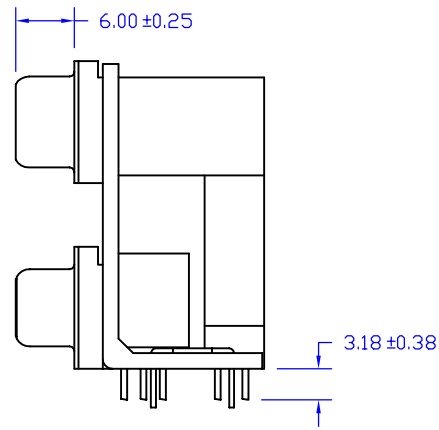


Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/12/04	Michael	Gavin	Stephen

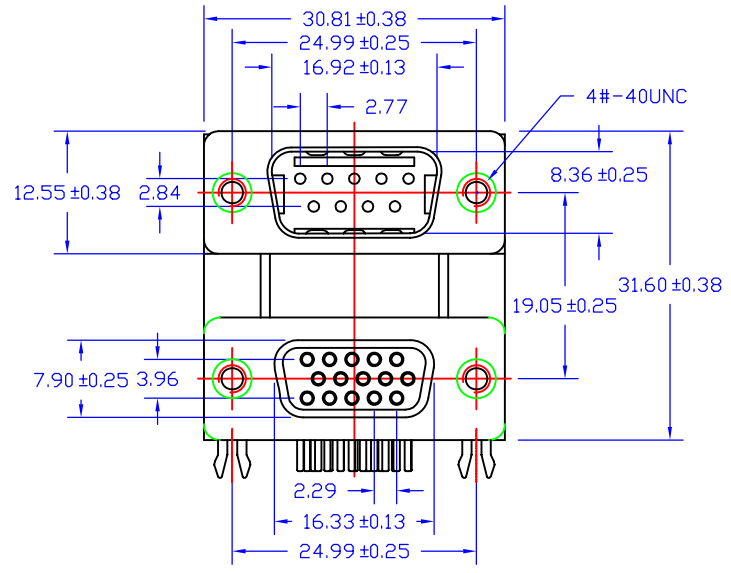

NOTE:

Material and Finish:



1. Housing: PBT (UL94V-0), Green.
2. Terminal: Brass, Gold Plating on Contact Area, Tin Plating on solder Tail.
3. Shield: Cold Roller Steel, Nickel Plating.

Electrical Characteristics:

1. Current Rating: 3.0 Amp. Max..
2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
3. Insulation Resistance: 5000M Ohms Min. at 500V DC.
4. Contact Resistance: 25m Ohms Max..

Mechanical Characteristics:

1. Operating Temperature: -55°C ~ +105°C
2. Contact Us for Customization.

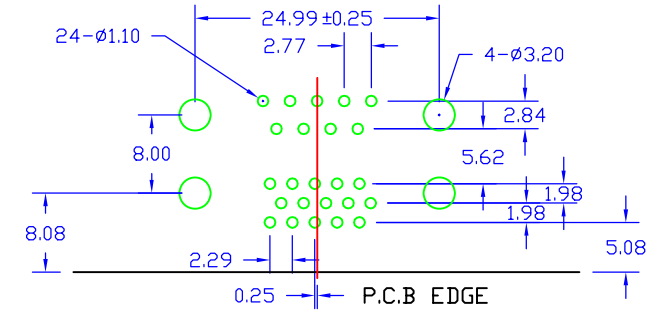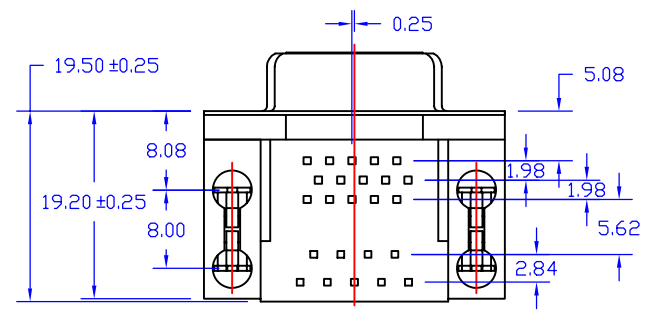

PCB Layout
(Top View)

Table 1

Part No.	Dimensions			
	Pos.	A	B	C
AEDSIR08B-009F	9			

Tolerance 0.0 ±0.38 0.00 ±0.25 0.000 ±0.13 Scale 1:1 Unit mm	Drawn By Michael	 AECONN Title D-Sub, DIP Right Angle, Dual Type, Top: 9P Male, Bottom: 15 HD Female AECOMN Technology Corp.
	Checked By Gavin	
	Approved By Stephen	

RoHS Compliant