

1

2

3

4

5

6

7

8

A

B

C

D

E

F

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/01/02	Michael	Gavin	Stephen

A


B

C

D

E

F

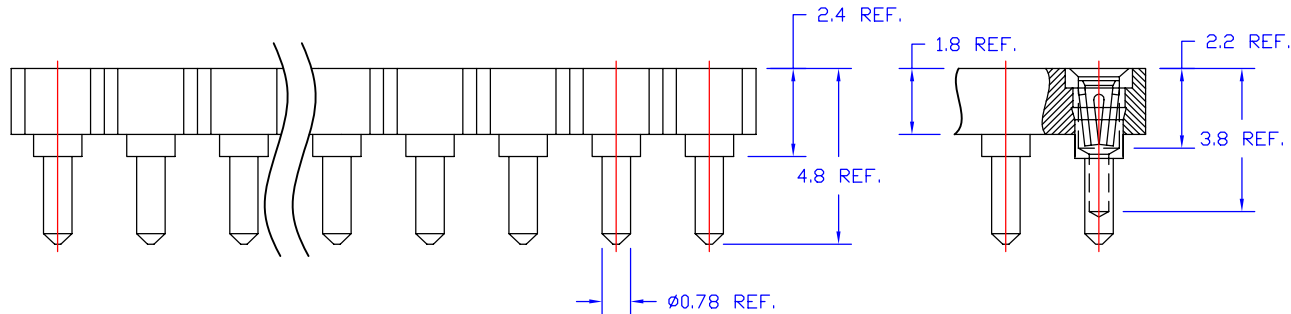

NOTE:

Material and Finish:

- Housing: GlassFilled Thermoplastic (UL94V-0), Black.
- Terminal: Stamped Beryllium Copper, Gold Plating on Contact Area, Tin Plating on Solder Tail.
- Sleeve: Brass, Tin Plating Over All.

Electrical Characteristics:

- Current Rating: 3.0 Amp. Max..
- Dielectric Withstand Voltage: 100V AC RMS for 60Seconds.
- Insulation Resistance: 1000M Ohms Min. at 500V DC.
- Contact Resistance: 30m Ohms Max..

Mechanical Characteristics:

- Operating Temperature: -25°C ~ +85°C
- Contact Us for Customization.

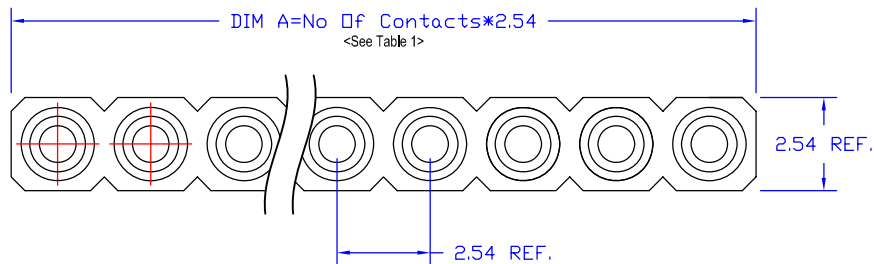


Table 1

Part No.	Dimensions			
	Pos.	A	B	C
H=2.4mm AEICEV01B-028L	28	71.12		

Tolerance 0.0 ±0.30 0.00 ±0.20 0.000 ±0.10 Scale 1:1 Unit mm	Drawn By Michael	 2.54mm Pitch, IC Socket, DIP Vertical, 28P, Screw Machine Pin, Female AECINN Technology Corp.
	Checked By Gavin	
	Approved By Stephen	

RoHS Compliant

1

2

3

4

5

6

7

8

Drawing No. IC001-S-01
Page 1/1