

1

2

3

4

5

6

7

8

A

B

C

D

E

F

A

B




C

D

E

F

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/01/11	Michael	Gavin	Stephen

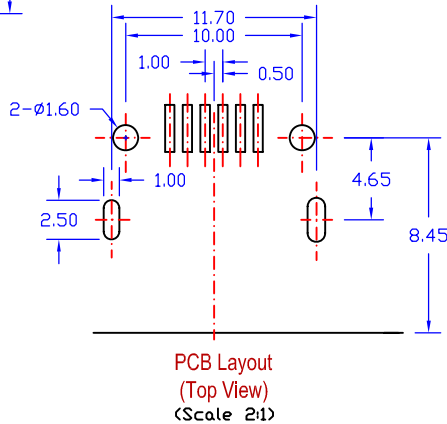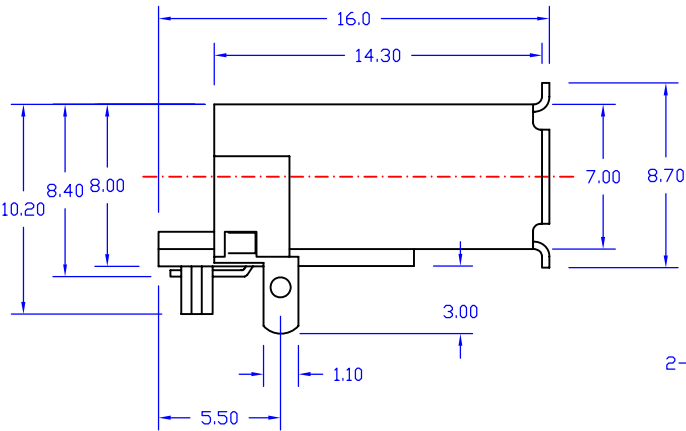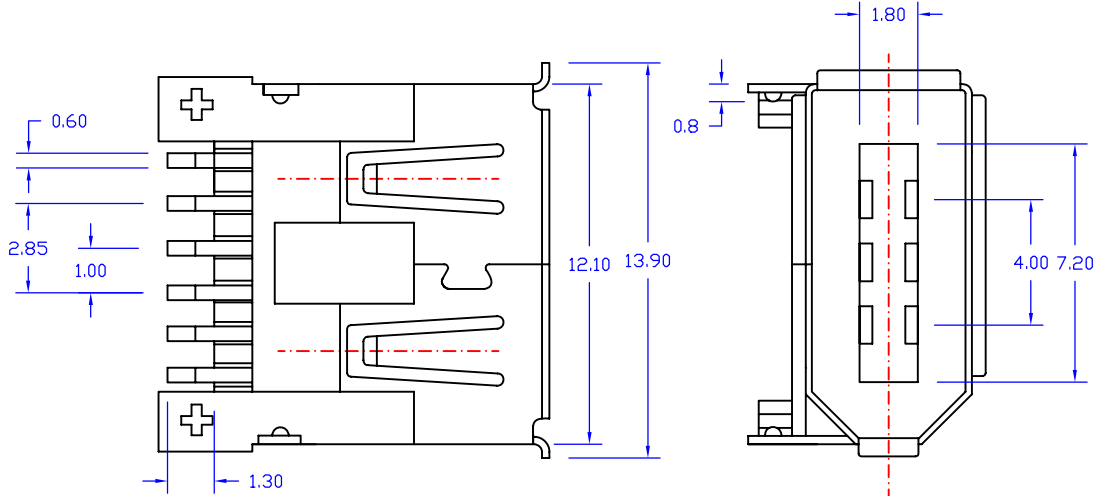

NOTE:

Material and Finish:

- 1. Housing: PA9T (UL94V-0), White.
- 2. Terminal: Brass, Gold Plating on Contact Area, Tin Plating on Solder Tail.
- 3. Shield: Brass, Nickel Plating.

Electrical Characteristics:

- 1. Current Rating: 1.5 Amp. Max..
- 2. Dielectric Withstand Voltage: 500V AC RMS for 60Seconds.
- 3. Insulation Resistance: 100M Ohms Min. at 500V DC.
- 4. Contact Resistance: 30m Ohms Max..

Mechanical Characteristics:

- 1. Operating Temperature: -55°C ~ +85°C
- 2. Contact Us for Customization.

Table 1

Part No.	Dimensions			
	Pos.	A	B	C
AEIE9S07B-006L	6			

RoHS Compliant

Tolerance 0.0 ±0.20 0.00 ±0.15	Drawn By Michael	AECONN
	Checked By Gavin	
Approved By Stephen	Title IEEE 1394, Surface Mount Right Angle, 6P, Metal Shield, Female	
Scale 1 : 1	Unit mm	AECONN Technology Corp.

IEE007-S-01
1/1
Page

1

2

3

4

5

6

7

8