

1

2

3

4

5

6


7

8

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2007/01/17	Michael	Gavin	Stephen


A

A

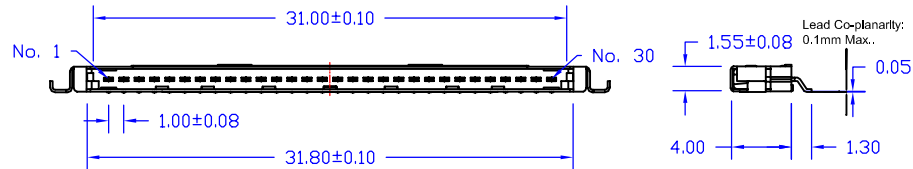

B

B

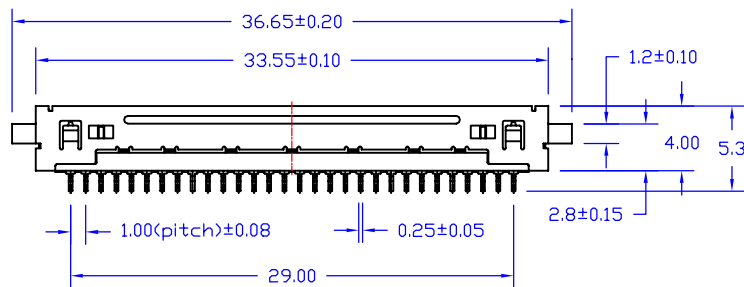

C

C

NOTE:

Material and Finish:

- 1. Housing: LCP (UL94V-0), Natural.
- 2. Terminal: Phosphor Bronze, Gold Plating on Contact Area, Tin Plating on Solder Tail.
- 3. Shield: Phosphor Bronze, Tin Plating.

Electrical Characteristics:

- 1. Current Rating: 1.0 Amp. Max..
- 2. Dielectric Withstand Voltage: 500V AC RMS for 60Seconds.
- 3. Insulation Resistance: 100M Ohms Min. at 100V DC.
- 4. Contact Resistance: 40m Ohms Max..

Mechanical Characteristics:


- 1. Operating Temperature: -25°C ~ +85°C
- 2. Contact Us for Customization.

Table 1

Part No.	Dimensions			
	Pos.	A	B	C
AEIF9S03B-030L	30			

D

D

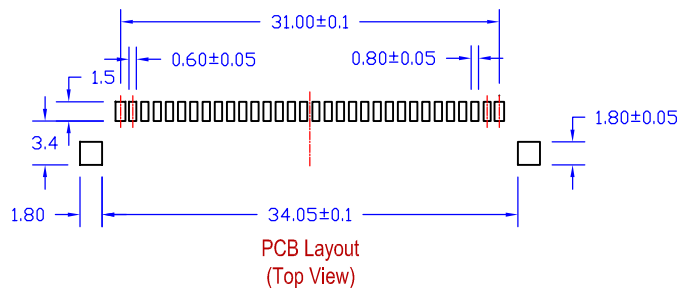

E

E

F

F

RoHS Compliant

Tolerance 0.0 ±0.20 0.00 ±0.15	Drawn By Michael	AECONN
	Checked By Gavin	
Approved By Stephen	Title 1.00mm Pitch, Interface Slide, Board on Type, 30P, Metal Shield, Female	
Scale 1 : 1	Unit mm	AECONN Technology Corp.

Drawing No. IF003-S-01
 Page 1/1

1

2

3

4

5

6

7

8