

1

2

3

4

5

6

7

8

A

B


C

D

E

F

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2007/01/18	Michael	Gavin	Stephen

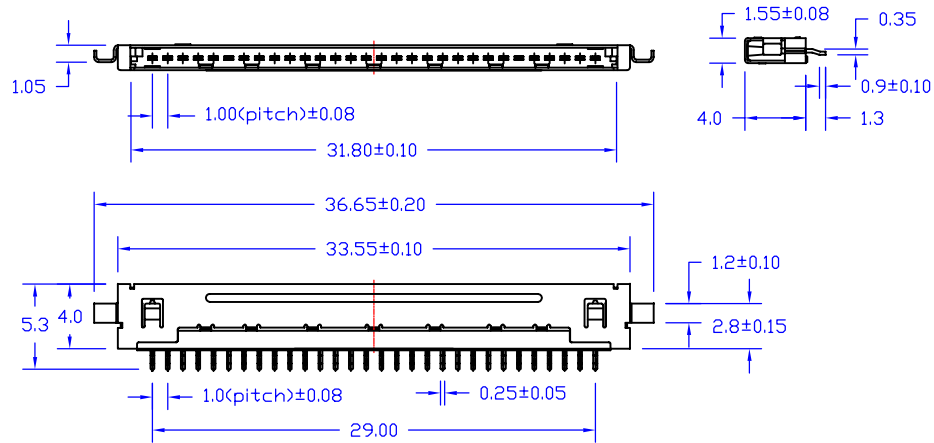

NOTE:


- Material and Finish:**
- Housing: LCP (UL94V-0), Natural.
 - Terminal: Phorsphor Bronze, Gold Plating on Contact Area, Tin Plating on Solder Tail.
 - Shield: SUS, Tin Plating.

- Electrical Characteristics:**
- Current Rating: 1.0 Amp. Max..
 - Dielectric Withstand Voltage: 500V AC RMS for 60Seconds.
 - Insulation Resistance: 100M Ohms Min. at 100V DC.
 - Contact Resistance: 40m Ohms Max..

- Mechanical Characteristics:**
- Operating Temperature: -25°C ~ +85°C
 - Contact Us for Customization.

Table 1

Part No.	Dimensions		
	H=1.55mm	Pos.	A B C
AEIF9S04B-030L	30		

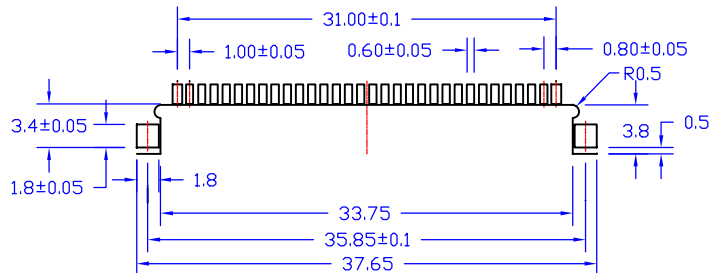

PCB Layout
(Top View)



Tolerance 0 ±0.25 0.0 ±0.20 0.00 ±0.15	Drawn By Michael	
	Checked By Gavin	
	Approved By Stephen	
Scale 1 : 1	Unit mm	Title 1.00mm Pitch, Interface Slide, Reverse Type, 30P, Metal Shield, Female
		AECOM Technology Corp.

Drawing No. IF004-S-01
Page 1/1

1

2

3

4

5

6

7

8

F