

1

2

3

4

5

6

7

8

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2007/01/18	Michael	Gavin	Stephen

A


B

C

D

E

F

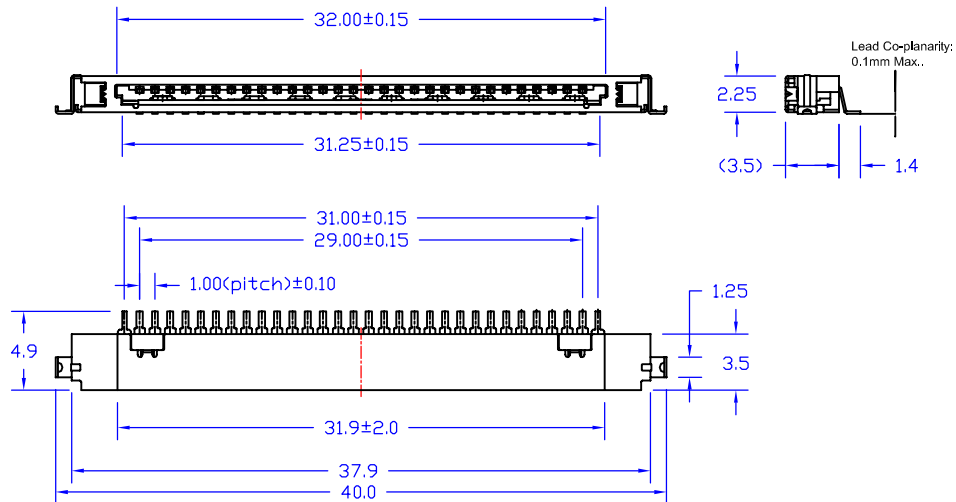

NOTE:

Material and Finish:

- Housing: PA9T (UL94V-0), Black.
- Terminal: Phosphor Bronze, Gold Plating on Contact Area, Tin Plating on Solder Tail.
- Shield: SUS, Tin Plating.

Electrical Characteristics:


- Current Rating: 1.0 Amp. Max..
- Dielectric Withstand Voltage: 500V AC RMS for 60Seconds.
- Insulation Resistance: 100M Ohms Min. at 100V DC.
- Contact Resistance: 40m Ohms Max..

Mechanical Characteristics:

- Operating Temperature: -25°C ~ +85°C
- Contact Us for Customization.

Table 1

Part No.	Dimensions			
H=2.25mm	Pos.	A	B	C
AEIF9S06B-030L	30			

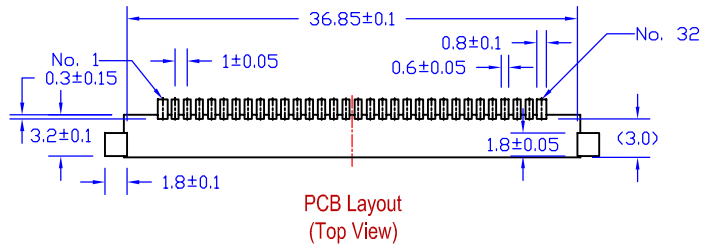

Tolerance 0 ±0.30 0.0 ±0.25 0.00 ±0.20	Drawn By Michael	
	Checked By Gavin	
	Approved By Stephen	
Scale 1 : 1	Unit mm	Title 1.00mm Pitch, Interface Slide, Board on Locking Type, 30P, Metal Shield, Female
AECNN Technology Corp.		Drawing No. IF006-S-01 Page 1/1



1

2

3

4

5

6

7

8

1/1