

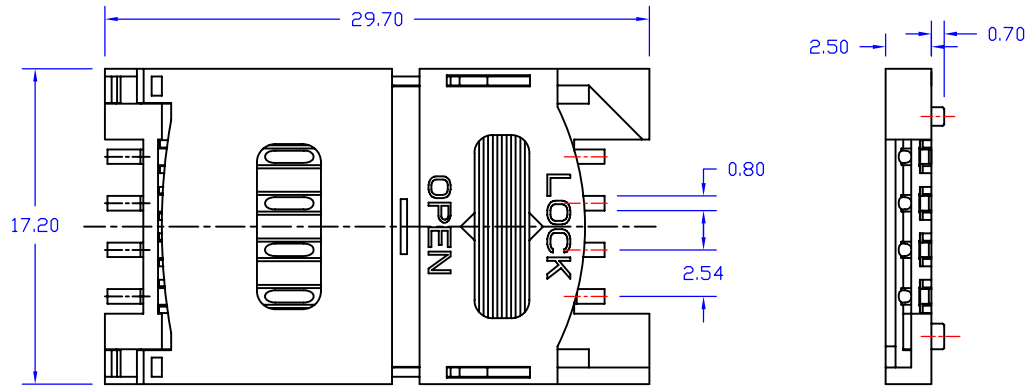
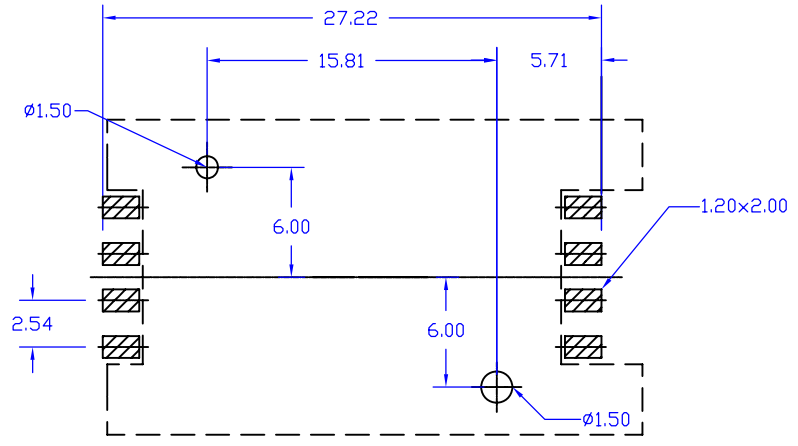


Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/12/22	Michael	Gavin	Stephen

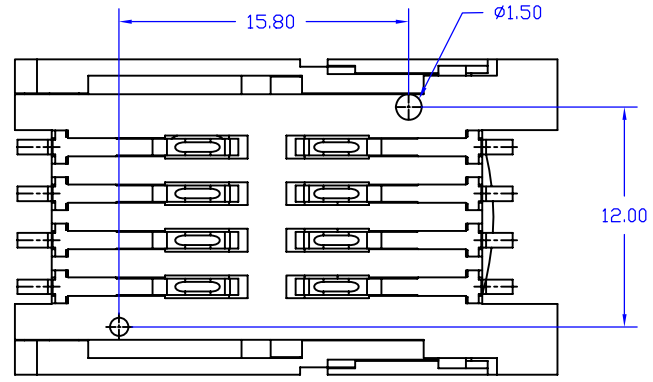

**NOTE:**

- Material and Finish:**  
 1. Housing: LCP (UL94V-0).  
 2. Terminal: Phosphor Bronze, Gold Plating on Contact Area, Tin Plating on solder Tail.
- Electrical Characteristics:**  
 1. Current Rating: 0.5 Amp. Max..  
 2. Dielectric Withstand Voltage: 500V AC RMS for 60Seconds.  
 3. Insulation Resistance: 1000M Ohms Min, at 500V DC.  
 4. Contact Resistance: 50m Ohms Max..
- Mechanical Characteristics:**  
 1. Operating Temperature: -25°C ~ +85°C  
 2. Contact Us for Customization.

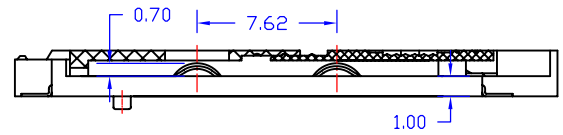

PCB Layout  
(Top View)

Table 1

Part No.	Dimensions			
	Pos.	A	B	C
AEMCES01B-008L	H=2.5mm 8			

Tolerance 0.0 ±0.38 0.00 ±0.25	Drawn By <b>Michael</b>	<b>AECONN</b>
	Checked By <b>Gavin</b>	
Scale 1:1	Unit mm	
Approved By <b>Stephen</b>		AECONN Technology Corp.

