

1

2

3

4

5

6

7

8

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/12/22	Michael	Gavin	Stephen

NOTE:

Material and Finish:

- 1. Housing: PA9T (UL94V-0), Black.
- 2. Terminal: Beryllium, Gold Plating Over All.

Electrical Characteristics:

- 1. Current Rating: 0.5 Amp. Max..
- 2. Dielectric Withstand Voltage: 500V AC RMS for 60Seconds.
- 3. Insulation Resistance: 1000M Ohms Min. at 500V DC.
- 4. Contact Resistance: 100m Ohms Max..

Mechanical Characteristics:

- 1. Operating Temperature: -25°C ~ +85°C
- 2. Contact Us for Customization.

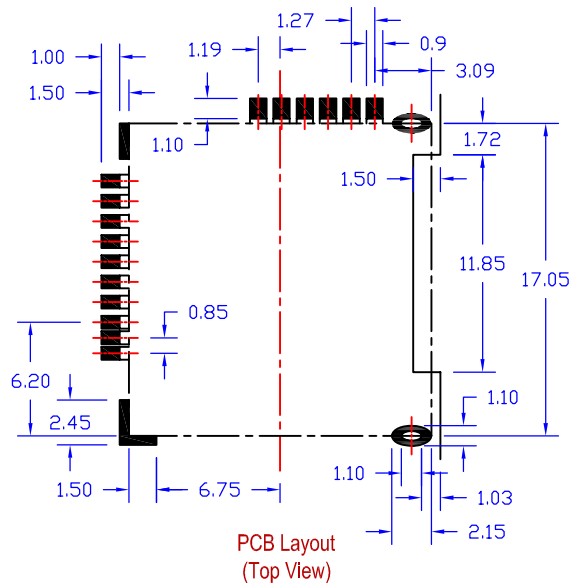
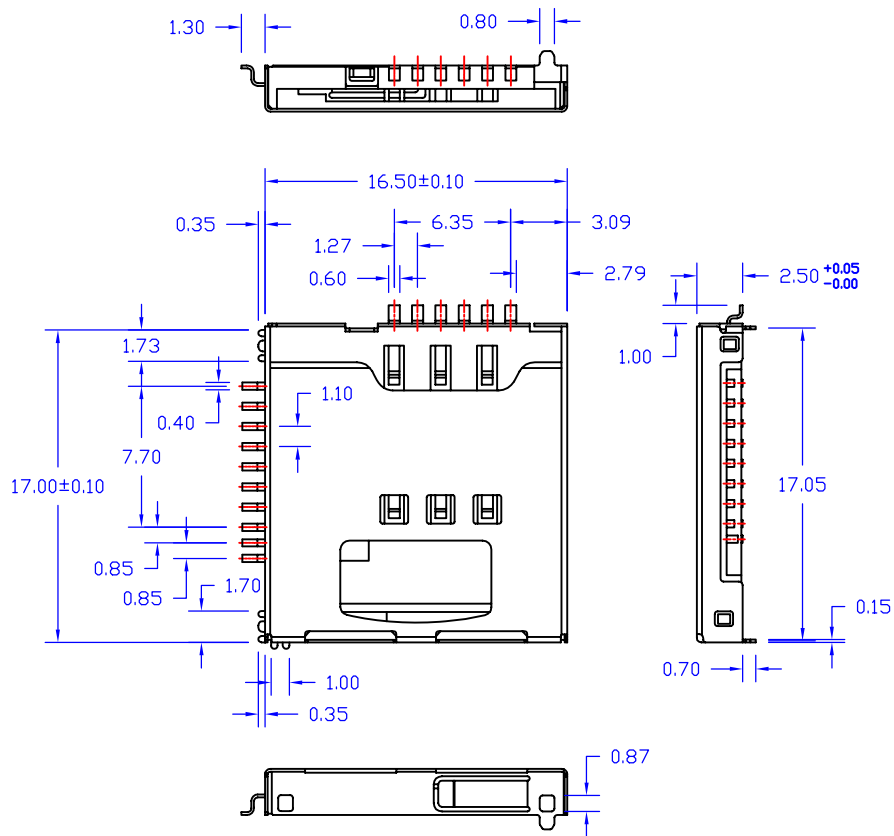


Table 1

Part No.	Dimensions			
	Pos.	A	B	C
H=2.5mm AEMCBS03A-016L	16			

Tolerance 0.0 ±0.20 0.00 ±0.10 0.000 ±0.005 Scale: 1:1 Unit: mm	Drawn By Michael	 AECONN Title 1.27mm Pitch, SIM+Micro SD Card, Surface Mount, 16P, Push Push Type AECONN Technology Corp.
	Checked By Gavin	
	Approved By Stephen	

RoHS Compliant

1

2

3

4

5

6

7

8