

1

2

3

4

5

6

7

8

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/12/26	Michael	Gavin	Stephen

A

B

C

D

E

F

A


B

C

D

E

F

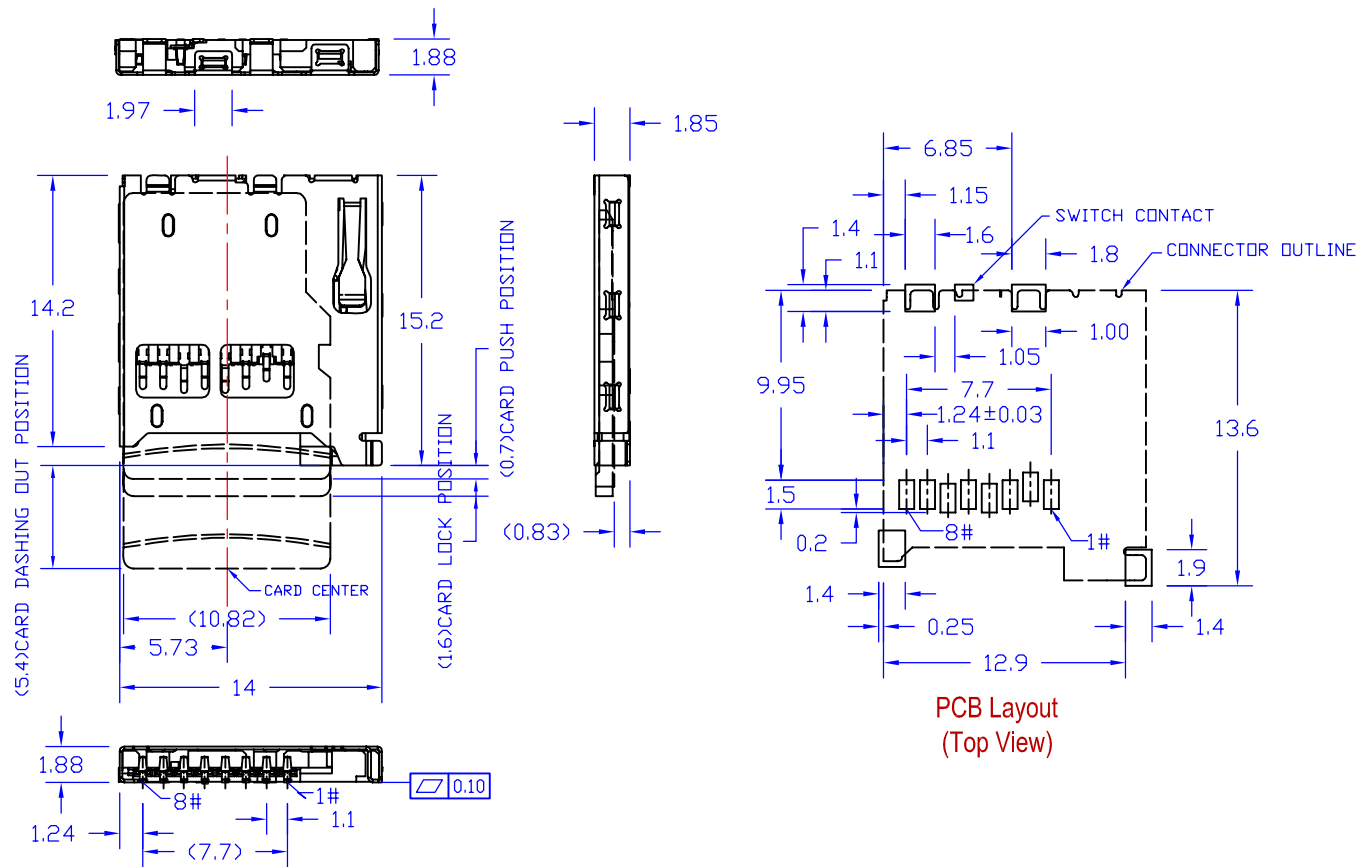

NOTE:

Material and Finish:

- 1. Housing: LCP (UL94V-0), Black.
- 2. Terminal: Copper Alloy, Gold Plating on Contact Area, Tin Plating on Solder Tail.
- 3. Shield: Stainless Steel.

Electrical Characteristics:

- 1. Current Rating: 0.5 Amp. Max..
- 2. Dielectric Withstand Voltage: 500V AC RMS for 60Seconds.
- 3. Insulation Resistance: 500M Ohms Min. at 500V DC.
- 4. Contact Resistance: 100m Ohms Max..


Mechanical Characteristics:

- 1. Operating Temperature: -25°C ~ +60°C
- 2. Contact Us for Customization.


Table 1

Part No.	Dimensions			
H=1.88mm	Pos.	A	B	C
AEMCAS26B-008L	8			

PCB Layout (Top View)



CARD UNLOCK



CARD LOCK

RoHS Compliant

Tolerance		Drawn By
0.0	±0.38	Michael
0.00	±0.25	Checked By
0.000	±0.10	Gavin
Scale		Approved By
1:1	Unit	Stephen
	mm	

AECONN

Title
1.10mm Pitch, T-Flash Card, Surface Mount, 8P, Push Push With Switch Type, With Cover

AECONN Technology Corp.

Drawing No. MC026-S-01
Page 1/1

1

2

3

4

5

6

7

8