

1

2

3

4

5

6

7

8

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/12/26	Michael	Gavin	Stephen

A



B

C

D

E

F

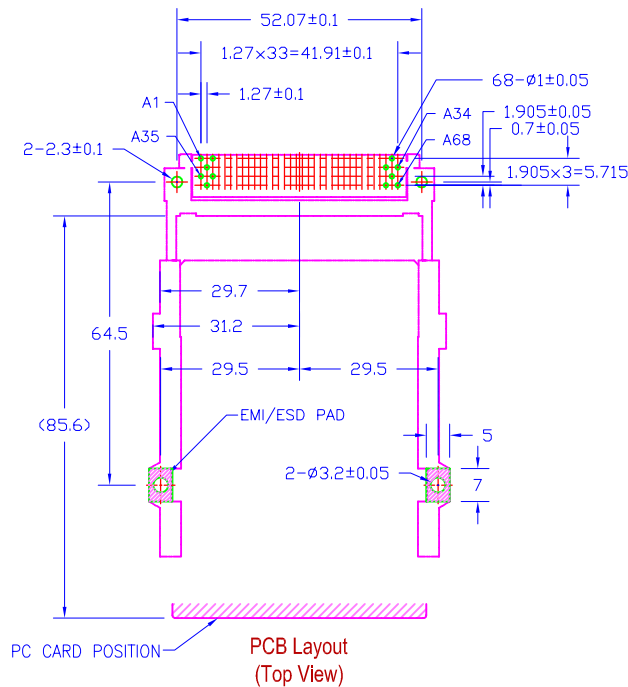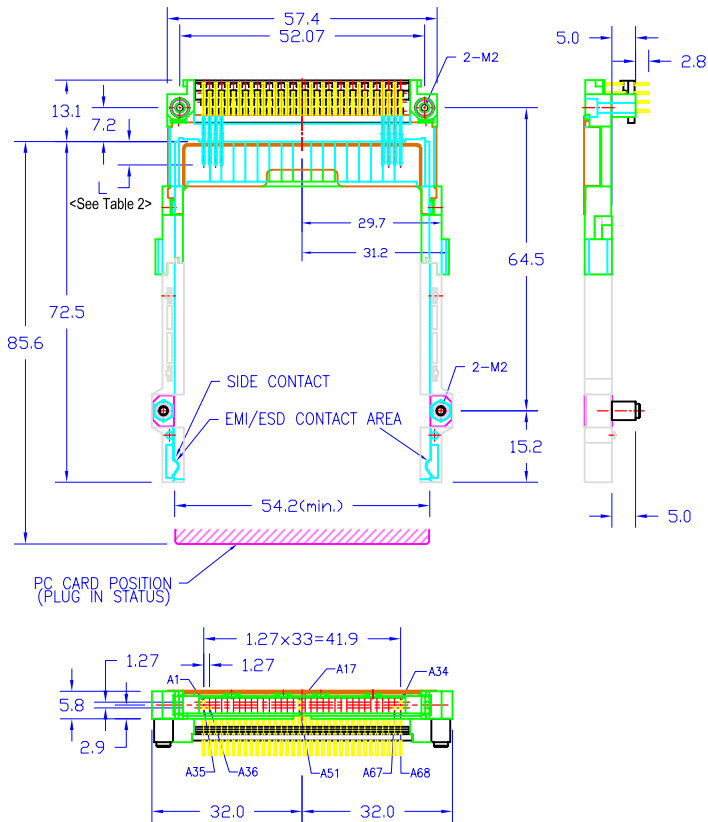

NOTE:

Material and Finish:

1. Housing: PBT (UL94V-0), Black.
2. Terminal: Copper Alloy, Gold Plating on Contact Area, Tin Plating on Solder Tail.

Electrical Characteristics:

1. Current Rating: 0.5 Amp. Max.,
2. Dielectric Withstand Voltage: 500V AC RMS for 60Seconds.
3. Insulation Resistance: 1000M Ohms Min. at 500V DC.
4. Contact Resistance: 40m Ohms Max..

Mechanical Characteristics:

1. Operating Temperature: -20°C ~ +60°C
2. Contact Us for Customization.

Table 1

Part No.	Dimensions			
	Pos.	A	B	C
AEMCBR29B-068F	68			

Table 2

Part No. for L	
Pin Number	Dimensions
36,67	3.5mm
All Other Pins	4.25mm
1,17,34,35,51,68	5.00mm

RoHS Compliant

Tolerance	0.0 ±0.30
	0.00 ±0.20
	0.000 ±0.10

Drawn By
Michael

Checked By
Gavin

Approved By
Stephen

AECONN

Title
1.27mm Pitch, PCMCIA Card, DIP Right Angle, 68P, 3.3V, Standoff:5.0mm

AECONN Technology Corp.

Drawing No. MCO29-S-01
Page 1/1

1

2

3

4

5

6

7

8