
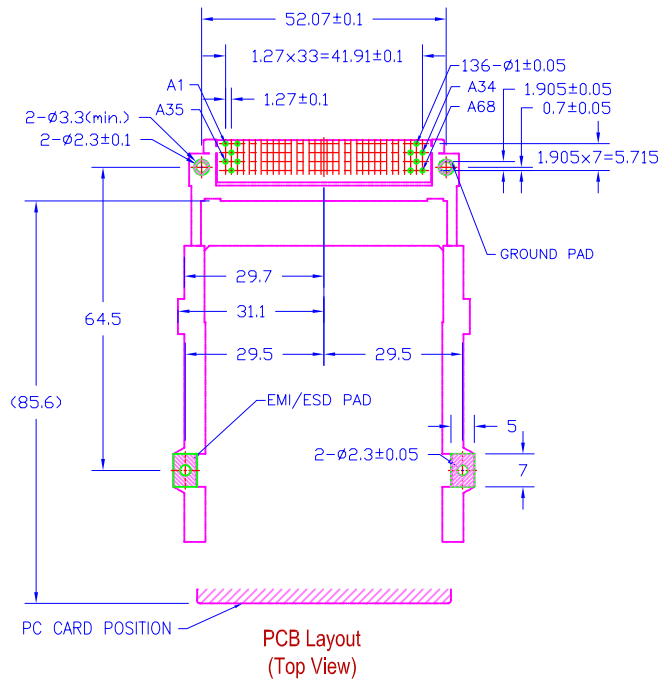
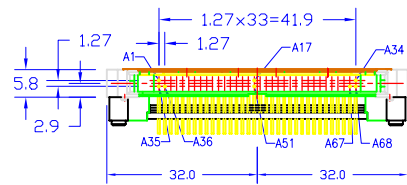


| Rev. | Description | Date       | Drawn by | Checked by | Approved by |
|------|-------------|------------|----------|------------|-------------|
| A    | New Drawing | 2006/12/26 | Michael  | Gavin      | Stephen     |
|      |             |            |          |            |             |
|      |             |            |          |            |             |

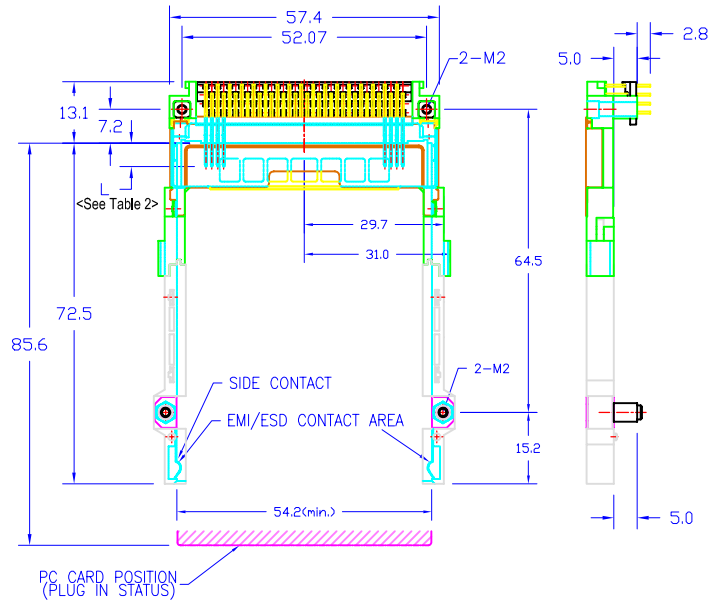

**NOTE:**

**Material and Finish:**

1. Housing: PBT (UL94V-0), Black.
2. Terminal: Copper Alloy, Gold Plating on Contact Area, Tin Plating on Solder Tail.

**Electrical Characteristics:**

1. Current Rating: 0.5 Amp. Max..
2. Dielectric Withstand Voltage: 500V AC RMS for 60Seconds.
3. Insulation Resistance: 1000M Ohms Min. at 500V DC.
4. Contact Resistance: 40m Ohms Max..

**Mechanical Characteristics:**

1. Operating Temperature: -20°C ~ +60°C
2. Contact Us for Customization.

**Table 1**

| Part No.       | Dimensions |   |   |   |
|----------------|------------|---|---|---|
|                | Pos.       | A | B | C |
| AEMCBR30B-068F | 68         |   |   |   |

**Table 2**

| Part No. for L   |            |
|------------------|------------|
| Pin Number       | Dimensions |
| 36,67            | 3.5mm      |
| All Other Pins   | 4.25mm     |
| 1,17,34,35,51,68 | 5.00mm     |

**RoHS Compliant**

|           |             |
|-----------|-------------|
| Tolerance | 0.0 ±0.30   |
|           | 0.00 ±0.20  |
|           | 0.000 ±0.10 |

Drawn By  
**Michael**

Checked By  
**Gavin**

Approved By  
**Stephen**

**AECONN**

Title  
**1.27mm Pitch, PCMCIA Card, DIP Right Angle, 68P, 3.3V, Standoff:5.0mm**

AECONN Technology Corp.

Drawing No. MC030-S-01  
Page 1/1