

1

2

3

4

5

6



7

8

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/12/26	Michael	Gavin	Stephen

A

A

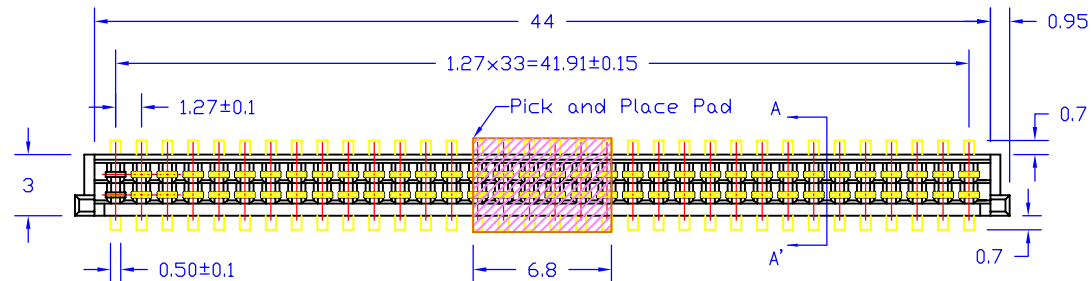

SECT.A-A'

NOTE:



- Material and Finish:**
 1. Housing: PA9T (UL94V-0), Black.
 2. Terminal: Copper Alloy, Gold Plating Over All.
- Electrical Characteristics:**
 1. Current Rating: 0.5 Amp. Max..
 2. Dielectric Withstand Voltage: 500V AC RMS for 60Seconds.
 3. Insulation Resistance: 1000M Ohms Min. at 500V DC.
 4. Contact Resistance: 40m Ohms Max..
- Mechanical Characteristics:**
 1. Operating Temperature: -40°C ~ +85°C
 2. Contact Us for Customization.

B

B

C

C

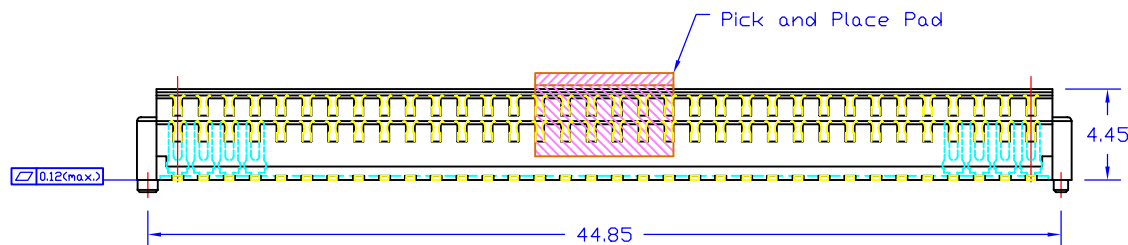

D

D

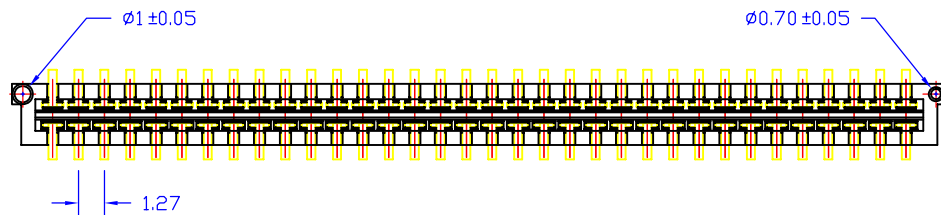


Table 1

Part No.	Dimensions			
	Pos.	A	B	C
H=4.45mm AEMCBS33A-068L	68			

E

E

F

F



1

2

3

4

5

6

7

8

Tolerance 0.0 ±0.20 0.00 ±0.15 0.000 ±0.10	Drawn By Michael		
	Checked By Gavin		Title 1.27mm Pitch, PCMCIA Card, Surface Mount Vertical, 68P
	Approved By Stephen		AECOMM Technology Corp.
Scale 1 : 1	Unit mm	Drawing No. MC033-S-01 Page 1/1	