

1

2

3

4

5

6

7

8

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/12/26	Michael	Gavin	Stephen

A

B

C

D

E

F

A



B

C

D

E

F

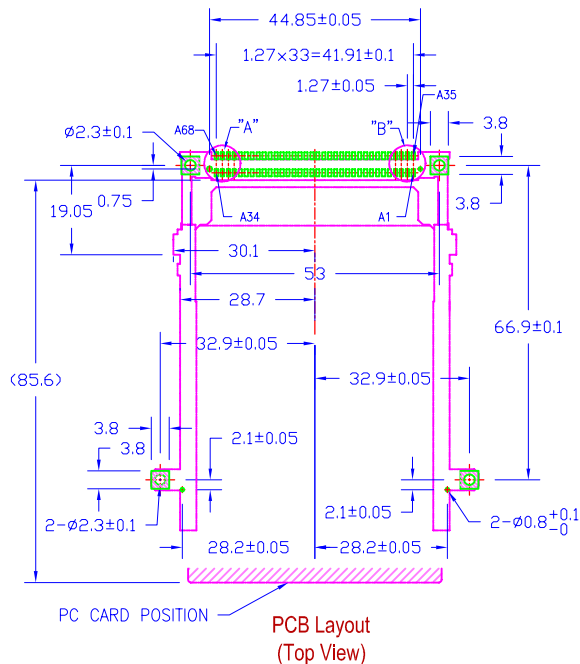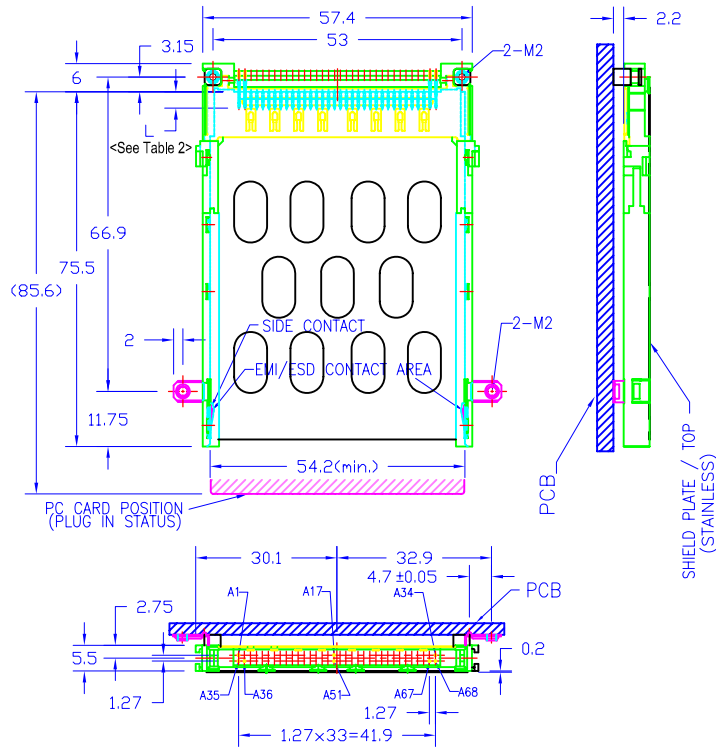


**NOTE:**  
**Material and Finish:**  
 1. Housing: PBT (UL94V-0), Black.  
 2. Terminal: Copper Alloy, Gold Plating Over All.  
**Electrical Characteristics:**  
 1. Current Rating: 0.5 Amp. Max..  
 2. Dielectric Withstand Voltage:  
     500V AC RMS for 60Seconds.  
 3. Insulation Resistance:  
     1000M Ohms Min. at 500V DC.  
 4. Contact Resistance: 40m Ohms Max..  
**Mechanical Characteristics:**  
 1. Operating Temperature: -20°C ~ +60°C  
 2. Contact Us for Customization.

Table 1

Part No.	Dimensions				
	H=5.5mm	Pos.	A	B	C
AEMCBX34A-068F	68				

Table 2

Part No. for L	
Pin Number	Dimensions
36,67	3.5mm
All Other Pins	4.25mm
1,17,34,35,51,68	5.00mm

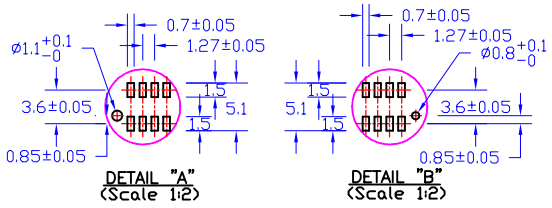

Tolerance	Drawn By	
0.0 ±0.30	Michael	
0.00 ±0.20	Checked By	
0.000 ±0.10	Gavin	Title <b>1.27mm Pitch, PCMCIA Card, Surface Mount Vertical, 68P, Standoff:2.2mm</b>
	Approved By	AECOM Technology Corp.
	Stephen	
Scale	Unit	
1:1	mm	

RoHS Compliant

Drawing No. MC034-S-01  
Page 1/1

1

2

3

4

5

6

7

8