


Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/12/27	Michael	Gavin	Stephen

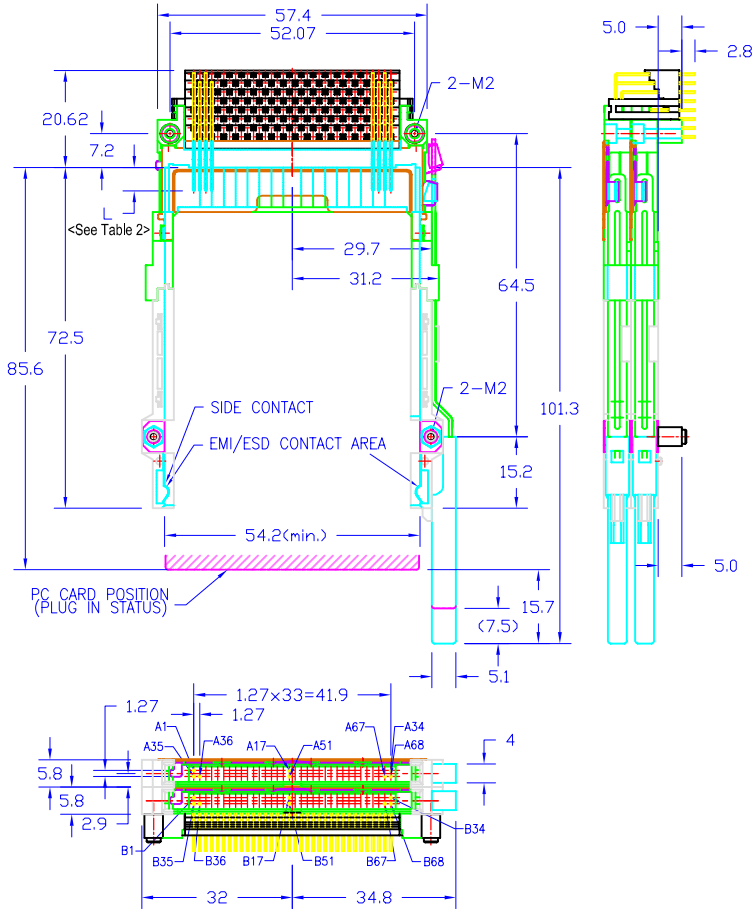

NOTE:
Material and Finish:
 1. Housing: PBT (UL94V-0), Black.
 2. Terminal: Copper Alloy, Gold Plating on Contact Area, Tin Plating on Solder Tail.
Electrical Characteristics:
 1. Current Rating: 0.5 Amp. Max..
 2. Dielectric Withstand Voltage: 500V AC RMS for 60Seconds.
 3. Insulation Resistance: 1000M Ohms Min, at 500V DC.
 4. Contact Resistance: 40m Ohms Max..
Mechanical Characteristics:
 1. Operating Temperature: -20°C ~ +60°C
 2. Contact Us for Customization.

Table 1

Part No.	Dimensions			
	Pos.	A	B	C
AEMCBR36B-068F	68			

Table 2

Part No. for L	
Pin Number	Dimensions
36,67	3.5mm
All Other Pins	4.25mm
1,17,34,35,51,68	5.00mm

PCB Layout (Top View)



Tolerance 0.0 ±0.30 0.00 ±0.20 0.000 ±0.10	Drawn By Michael		
	Checked By Gavin		Title 1.27mm Pitch, PCMCIA Card, DIP Right Angle, 68P, 5.0V, Standoff:5.0mm
	Approved By Stephen		AECOM Technology Corp.

Drawing No. MC036-S-01
 Page 1/1