

1

2

3

4

5

6

7

8

A

B

C

D

E

F

A

B



C

D

E

F

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/12/28	Michael	Gavin	Stephen

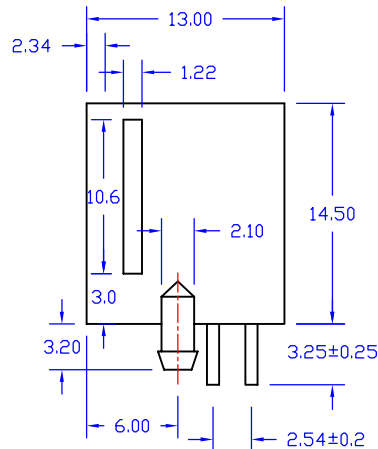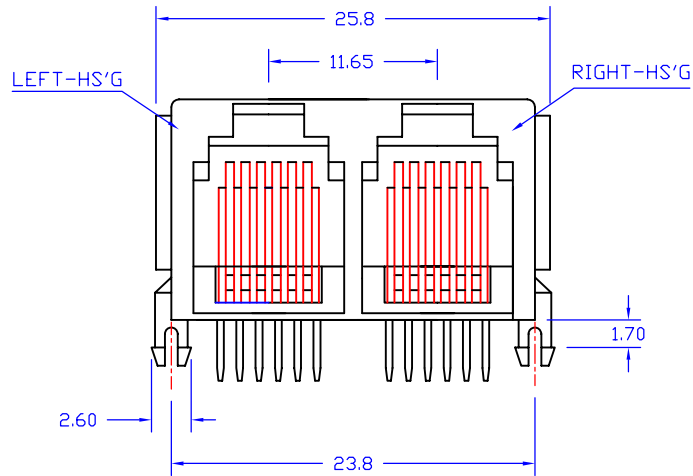

**NOTE:**

**Material and Finish:**



- 1. Housing: PBT (UL94V-0), Black.
- 2. Terminal: Phosphor Bronze, Gold Plating Over All.

**Electrical Characteristics:**

- 1. Current Rating: 1.5 Amp. Max..
- 2. Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
- 3. Insulation Resistance: 500M Ohms Min. at 500V DC.
- 4. Contact Resistance: 30m Ohms Max..

**Mechanical Characteristics:**

- 1. Operating Temperature: -40°C ~ +70°C
- 2. Contact Us for Customization.

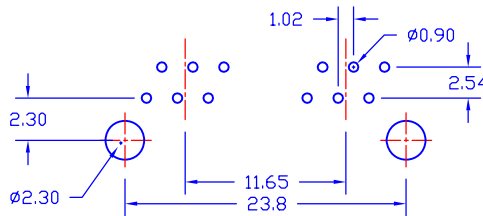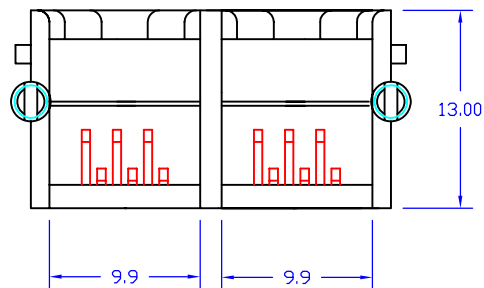

PCB Layout  
(Top View)

Table 1

Part No.	Dimensions			
	Pos.	A	B	C
AEMJEE03A-012F	12			

Tolerance	
0.0	±0.25
0.00	±0.13
0.000	±0.05

Drawn By	Michael
Checked By	Gavin
Approved By	Stephen

**AECONN**

**Modular Jack, DIP Right Angle,  
Side Entry, 6P6C, All Plastic**

AECONN Technology Corp.

Scale	Unit
1:1	mm

Drawing No.	MJ003-S-01
Page	1/1

**RoHS Compliant**

1

2

3

4

5

6

7

8