

1

2

3

4

5


6

7


8

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/12/28	Michael	Gavin	Stephen


A

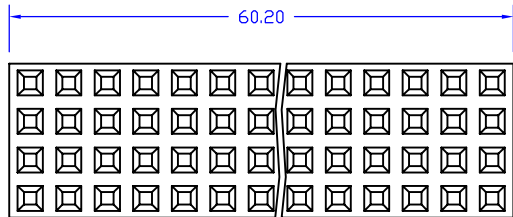


B

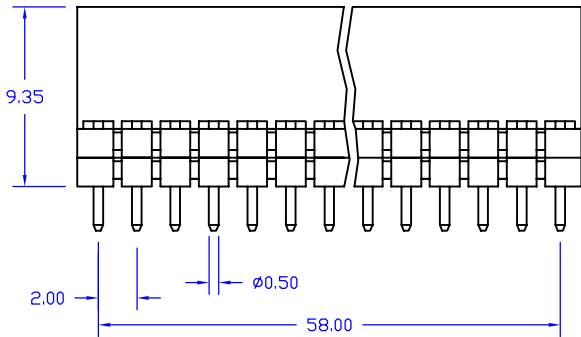

C



D

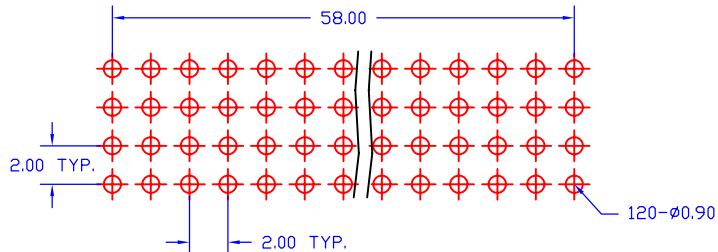

PCB Layout  
(Top View)

**NOTE:**

**Material and Finish:**

- 1. Housing: PBT (UL94V-0), Black.
- 2. Terminal: Copper Alloy, Gold Plating Over All.

**Electrical Characteristics:**

- 1. Current Rating: 1.0 Amp. Max..
- 2. Dielectric Withstand Voltage: 800V AC RMS for 60Seconds.
- 3. Insulation Resistance: 5000M Ohms Min. at 500V DC.
- 4. Contact Resistance: 30m Ohms Max..

**Mechanical Characteristics:**

- 1. Operating Temperature: -40°C ~ +85°C
- 2. Contact Us for Customization.

**Table 1**

Part No.	Dimensions			
	Pos.	A	B	C
H=9.35mm AEPCCV02A-430F	120			

A

B

C

D

E

F



1

2

3

4

5

6

7

8

Tolerance 0.0 ±0.38 0.00 ±0.25	Drawn By <b>Michael</b>	<b>AECONN</b>
	Checked By <b>Gavin</b>	
Approved By <b>Stephen</b>	Title <b>2.00mm Pitch, PC104 Receptacle, DIP Vertical, Quad, 120P, Pin H:2.28mm</b>	
Scale 1:1	Unit mm	AECONN Technology Corp.

Drawing No. PC002-S-01  
Page 1/1

F