

1

2

3

4

5

6

7

8

A

B


C

D

E

F

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2007/01/16	Michael	Gavin	Stephen

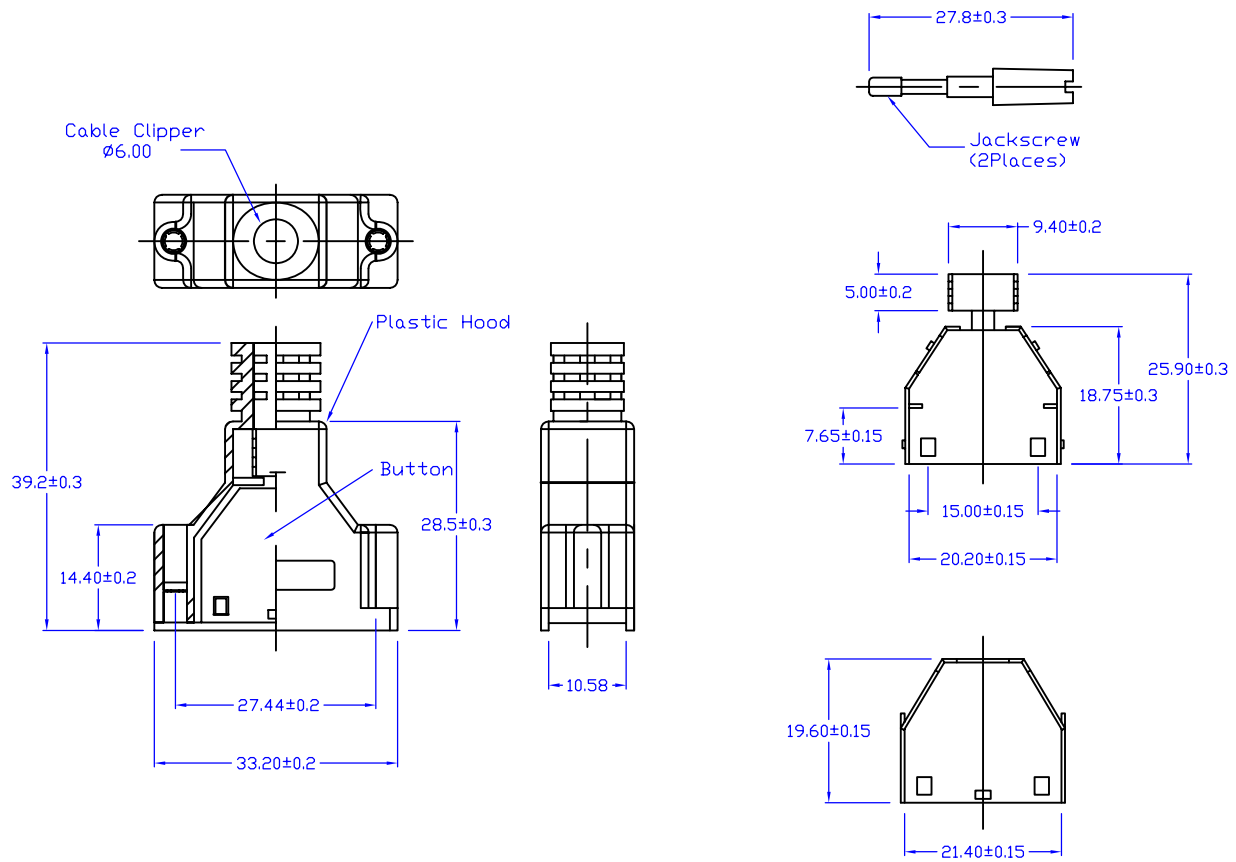

NOTE:

Material and Finish:

- 1. Housing: ABS (UL94V-0), Black.
- 2. Screw: Steel, Nickel Plating Over All.
- 3. Shield: Steel, Nickel Plating.

Electrical Characteristics:

- 1. Current Rating: 1.0 Amp. Max..
- 2. Dielectric Withstand Voltage: 500V AC RMS for 60Seconds.
- 3. Insulation Resistance: 500M Ohms Min. at 500V DC.
- 4. Contact Resistance: 35m Ohms Max..

Mechanical Characteristics:

- 1. Operating Temperature: -25°C ~ +60°C
- 2. Contact Us for Customization.

Table 1

Part No.	Dimensions			
	Pos.	A	B	C
AESCBM02F-020F	20			

RoHS Compliant

Tolerance 0.0 ±0.30 0.00 ±0.20 0.000 ±0.10 Scale 1:1 Unit mm	Drawn By Michael	 1.27mm Pitch, Centronic, Solder Type, 20P, Metal Shield with Latch, Male AECONN Technology Corp.
	Checked By Gavin	
	Approved By Stephen	

Drawing No. SC003-S-01
Page 1/1

1

2

3

4

5

6

7

8

F