

1

2

3

4

5

6

7

8

A

B

C

D

E

F

A

B


C

D

E

F

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2007/01/17	Michael	Gavin	Stephen

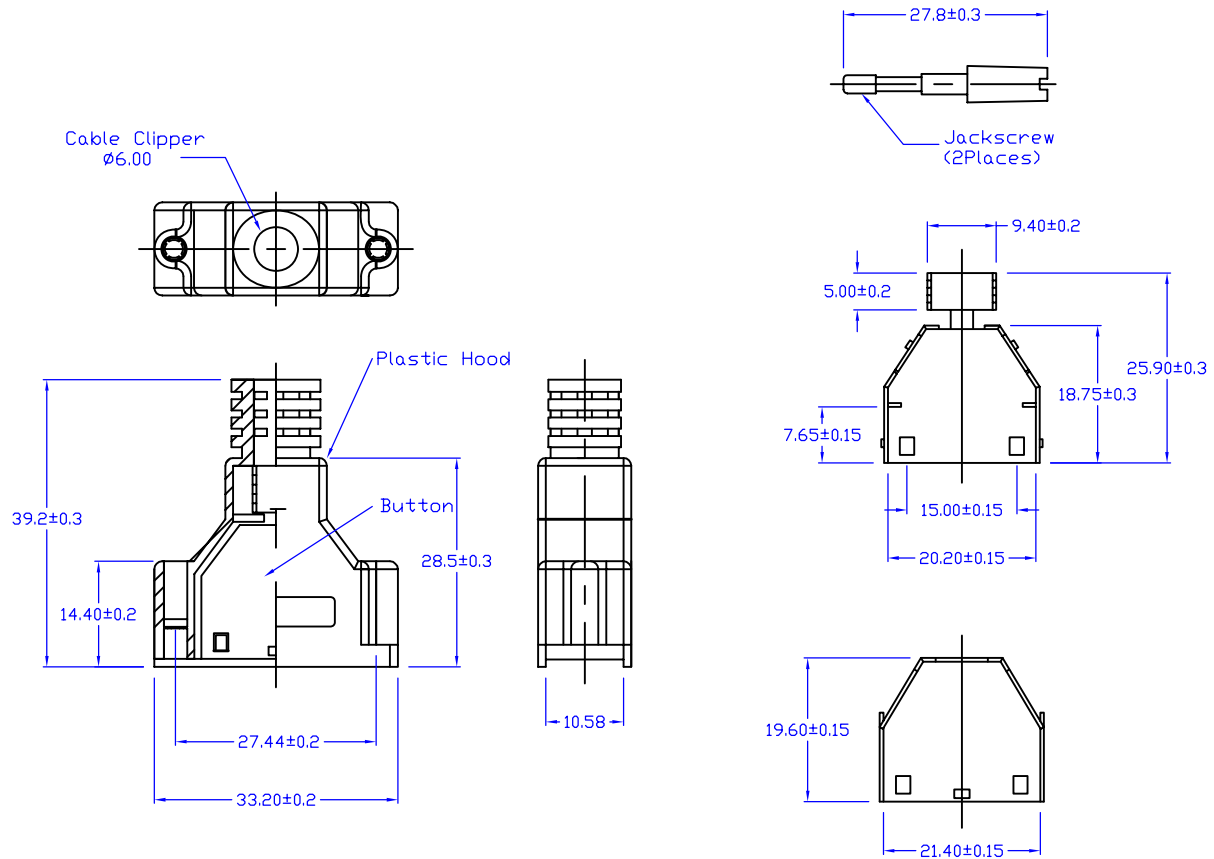

**NOTE:**  
**Material and Finish:**  
 1. Housing: ABS (UL94V-0), Black.  
 2. Screw: Steel, Nickel Plating Over All.  
 3. Shield: Steel, Nickel Plating.  
**Electrical Characteristics:**  
 1. Current Rating: 1.0 Amp. Max..  
 2. Dielectric Withstand Voltage: 500V AC RMS for 60Seconds.  
 3. Insulation Resistance: 500M Ohms Min. at 500V DC.  
 4. Contact Resistance: 35m Ohms Max..  
**Mechanical Characteristics:**  
 1. Operating Temperature: -25°C ~ +60°C  
 2. Contact Us for Customization.

**Table 1**

Part No.	Dimensions		
	H=4.6mm	Pos.	A B C
AESCBM03B-020F	20		

**RoHS Compliant**

Tolerance 0.0 ±0.30 0.00 ±0.20 0.000 ±0.10	Drawn By <b>Michael</b>		
	Checked By <b>Gavin</b>		Title <b>1.27mm Pitch, Centronic, Solder Screw Type, 20P, Metal Shield with Jackscrew, Male</b>
	Approved By <b>Stephen</b>		AECOMM Technology Corp.
Scale 1:1	Unit mm	Drawing No. SC005-S-01 Page 1/1	

1

2

3

4

5

6

7

8