

1

2

3

4


5

6

7

8

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2007/01/03	Michael	Gavin	Stephen

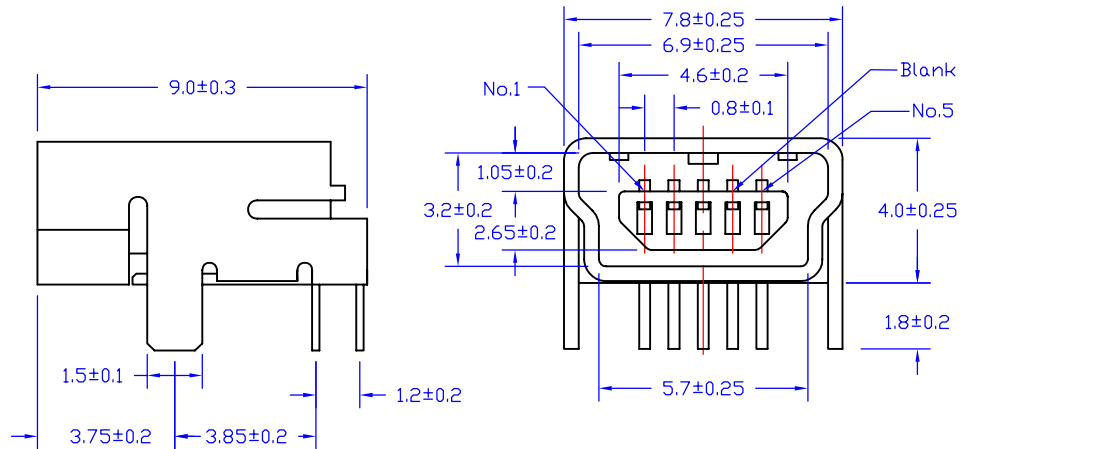

NOTE:

Material and Finish:



- 1. Housing: PA9T (UL94V-0), Black.
- 2. Terminal: Phosphor Bronze, Gold Plating on Contact Area, Tin Plating on Solder Tail.
- 3. Shield: Brass, Nickel Plated Over All.

Electrical Characteristics:

- 1. Current Rating: 1.0 Amp. Max..
- 2. Dielectric Withstand Voltage: 100V AC RMS for 60Seconds.
- 3. Insulation Resistance: 100M Ohms Min. at 500V DC.
- 4. Contact Resistance: 30m Ohms Max..

Mechanical Characteristics:

- 1. Operating Temperature: -55°C ~ +85°C
- 2. Contact Us for Customization.

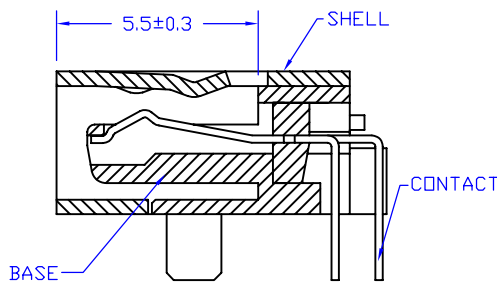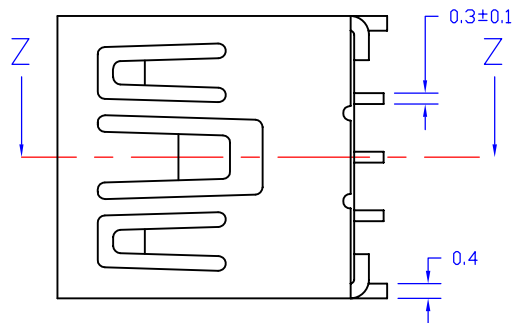

SECTION Z-Z


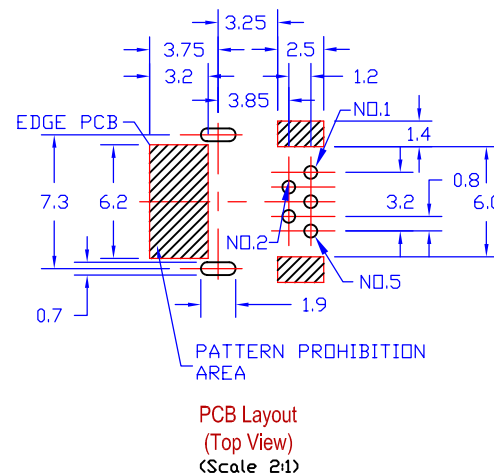


Table 1

Part No.	Dimensions			
H=4.0mm	Pos.	A	B	C
AEUB8S05B-005L	5			

Tolerance	0.0 ±0.20
	0.00 ±0.10



Scale	1:1
Unit	mm

Drawn By	Michael
Checked By	Gavin
Approved By	Stephen

AECONN

Title
Mini USB B Type, DIP Right Angle, 5P, Metal Shield, Female

AECONN Technology Corp.



1

2

3

4

5

6

7

8