



Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/01/05	Michael	Gavin	Stephen

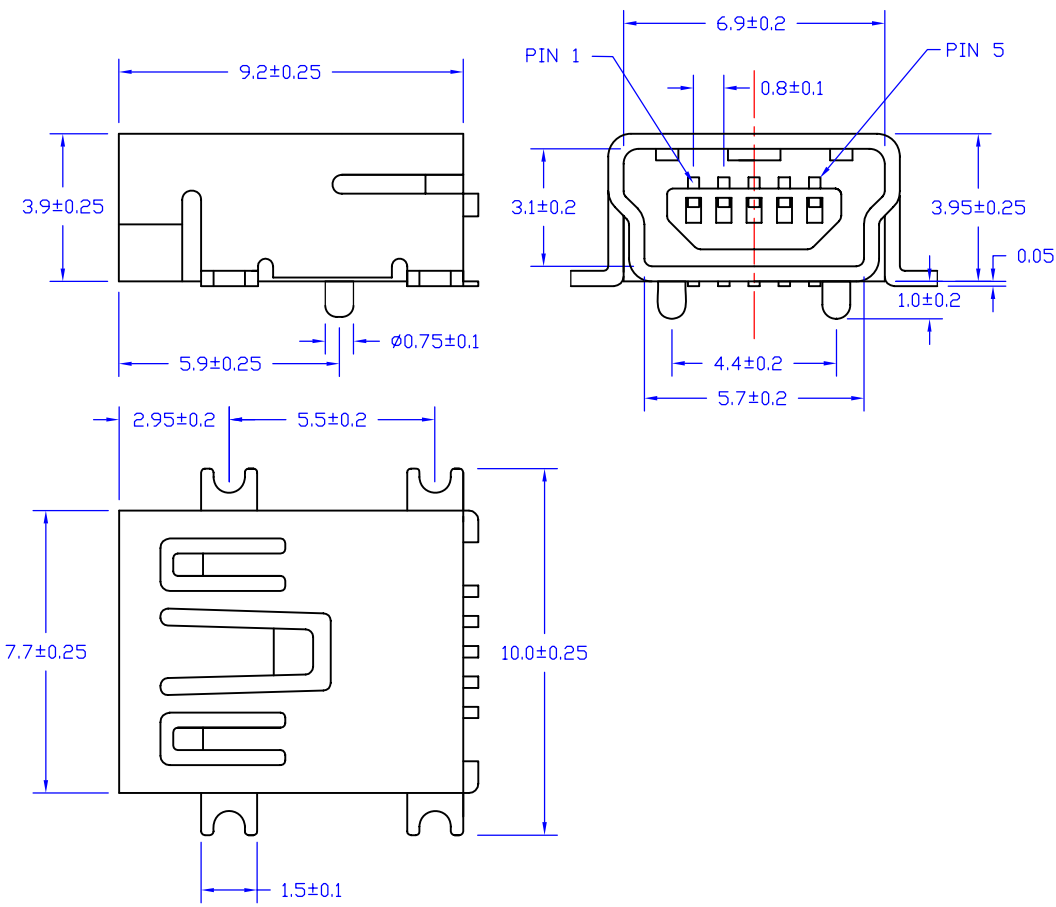

**NOTE:**

- Material and Finish:**
- Housing: PA9T (UL94V-0), Black.
  - Terminal: Phosphor Bronze, Gold Plating on Contact Area, Tin Plating on Solder Tail.
  - Shield: Brass, Nickel Plating Over All.
- Electrical Characteristics:**
- Current Rating: 1.0 Amp. Max..
  - Dielectric Withstand Voltage: 100V AC RMS for 60Seconds.
  - Insulation Resistance: 110M Ohms Min. at 500V DC.
  - Contact Resistance: 50m Ohms Max..
- Mechanical Characteristics:**
- Operating Temperature:  $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
  - Contact Us for Customization.

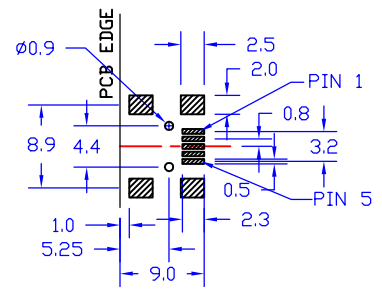

PCB Layout  
 (Top View)  
 (Scale 2:1)

**Table 1**

Part No.	Dimensions			
	Pos.	A	B	C
AEUB8S11B-004L	4			

Tolerance 0.0 ±0.25 0.00 ±0.13	Drawn By <b>Michael</b>	<b>AECONN</b>
	Checked By <b>Gavin</b>	
Approved By <b>Stephen</b>	Title <b>Mini USB B Type, Surface Mount Right Angle, 4P, Metal Shield, Female</b>	
Scale 1:1	Unit mm	AECONN Technology Corp.

