

1

2

3

4

5

6

7

8

Rev.	Description	Date	Drawn by	Checked by	Approved by
A	New Drawing	2006/12/26	Michael	Gavin	Stephen

A



B

C

D

E

F

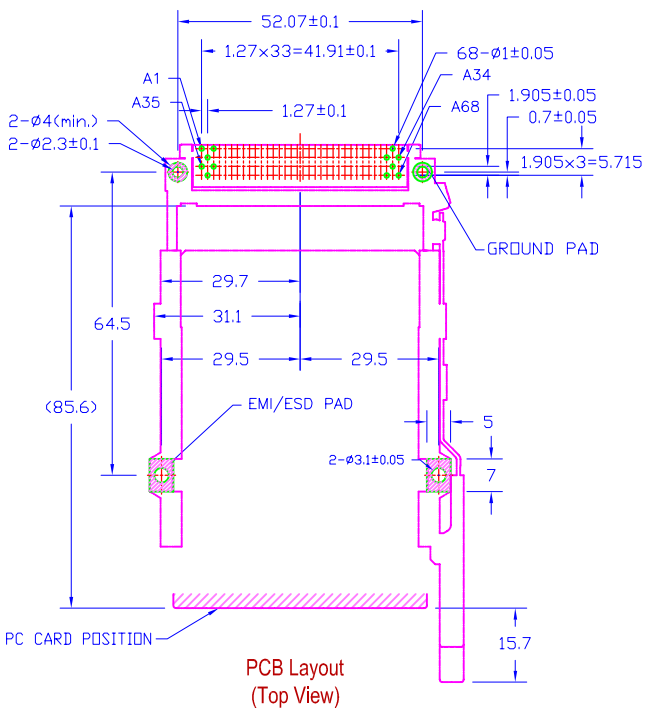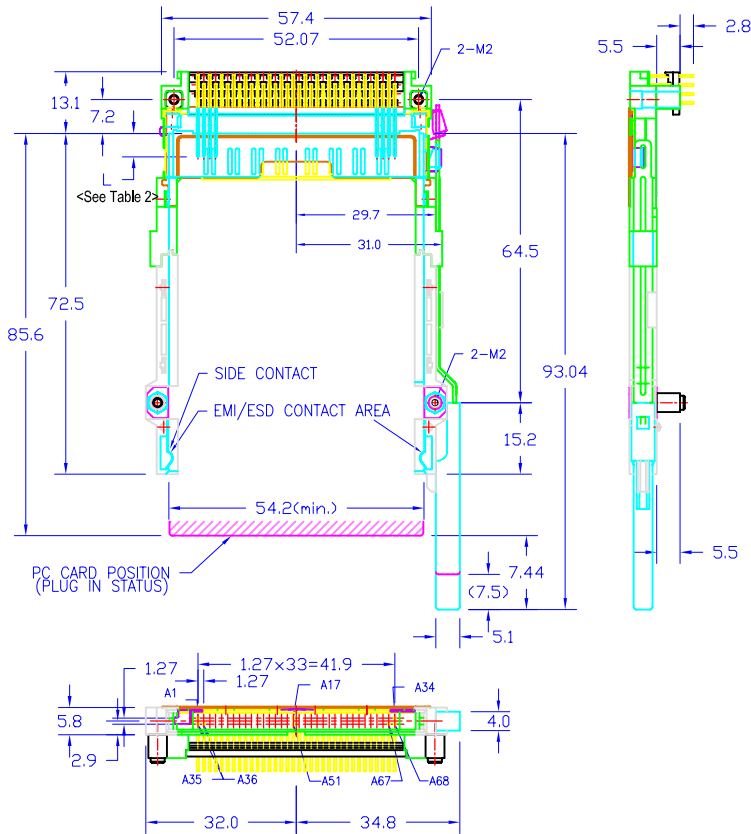

**NOTE:**  
**Material and Finish:**  
 1. Housing: PBT (UL94V-0), Black.  
 2. Terminal: Copper Alloy, Gold Plating on Contact Area, Tin Plating on Solder Tail.  
**Electrical Characteristics:**  
 1. Current Rating: 0.5 Amp. Max..  
 2. Dielectric Withstand Voltage: 500V AC RMS for 60Seconds.  
 3. Insulation Resistance: 1000M Ohms Min. at 500V DC.  
 4. Contact Resistance: 40m Ohms Max..  
**Mechanical Characteristics:**  
 1. Operating Temperature: -20°C ~ +60°C  
 2. Contact Us for Customization.

Table 1

Part No.	Dimensions		
	H=5.8mm	Pos.	A B C
AEMCBR31B-068F	68		

Table 2

Part No. for L	
Pin Number	Dimensions
36,67	3.5mm
All Other Pins	4.25mm
1,17,34,35,51,68	5.00mm

RoHS Compliant

Tolerance	0.0 ±0.30 0.00 ±0.20 0.000 ±0.10	Drawn By <b>Michael</b>
		Checked By <b>Gavin</b>
		Approved By <b>Stephen</b>
Scale	1:1	Unit mm

**AECONN**

Title  
**1.27mm Pitch, PCMCIA Card, DIP Right Angle, 68P, 3.3V, Standoff:5.5mm**

AECNN Technology Corp.

Drawing No. MC031-S-01  
 Page 1/1

1

2

3

4

5

6

7

8